

[a3-colour-photocopiers]


Sharp BP-71C45

The Sharp BP-71C45 is a smart A3 colour MFP with multi-layered security features and advanced environmental credentials, perfect for any modern office.




- 45ppm A3 colour MFP with seamless integration and connection to cloud based business process applications
- Multi-layered security features include automatic BIOS recovery if anomalies are detected during start-up and standard Trusted Platform Module to keep your confidential data secure
- Collaborate with ease using the Microsoft® Teams connector to print from or scan to your Microsoft® Teams channels directly from the MFP control panel
- Keep your data, device and network secure with optional Bitdefender anti-malware protection software*1
- Bring more flexibility to your print output with an extensive range of finishing options including stapling, punching and folding
- A sustainable design uses up to 50% recycled plastics in manufacturing the base unit of the MFP and cardboard packaging helps reduces plastic waste
- Complete large jobs quickly and efficiently with scan speeds of up to 300ipm and optional double feed detection*2 stops scanning when two or more sheets are fed at once
- Advanced eco-technologies deliver an impressively low TEC value and standby power consumption rate
- With support for Microsoft Entra ID you can manage identities and control device access via a secure cloud-based tool
- Intuitive icons and a smartphone style interface on the 10.1-inch colour LCD control panel make operating the MFP smooth and easy
- Single sign-on lets you securely print from or scan to public cloud storage services quickly and easily
- Keep up-to-date and compliant with automatic online firmware and application updates via the Sharp Application Portal

Konfiguracje

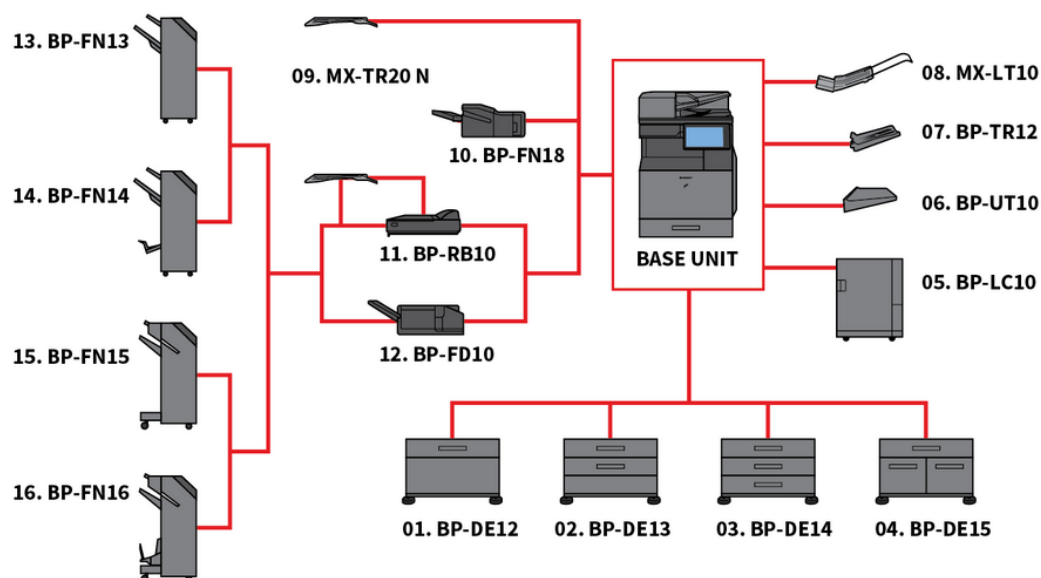

Konfiguracje mogą się różnić w zależności od regionu. Skontaktuj się z przedstawicielem Sharp aby uzyskać więcej informacji.

Wymiary

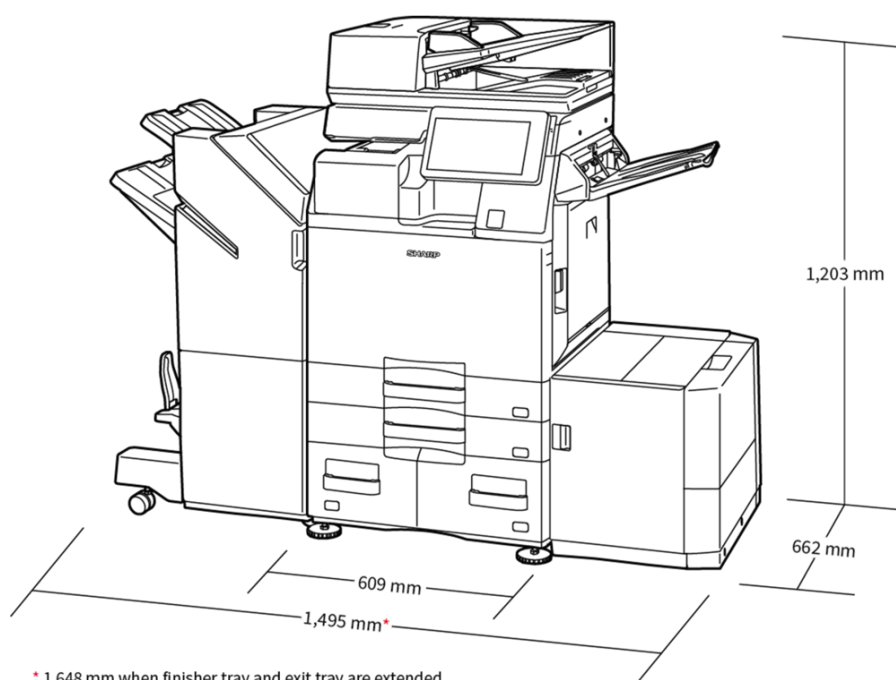

Pokazane wymiary uwzględniają dodatkowe wyposażenie. Opcje mogą się różnić w zależności od regionu.

Opcje

[print-options-base-unit]

BP-DD10 Double Feed Detection Unit

Eliminates double feeding of paper while scanning

BP-DE12 Stand with 550-sheet Paper Drawer

550 sheets (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

BP-DE13 Stand with 2 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

BP-DE14 Stand with 3 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

BP-DE15 Stand with 550 + 2100-sheet Paper Drawers

Upper tray: SRA3-A5R, 550 sheets* (60-300 g/m2); Lower tray (Left): A4, 1,200 sheets* (60-105 g/m2); Lower tray (Right): A4 - B5, 900 sheets* (60-105 g/m2); * Number of sheets based on 80 g/m2

BP-LC10 Large Capacity Tray

3,000 sheets (based on 80 g/m2), A4-B5 (60-220 g/m2)

BP-UT10 Utility Table

[empty]

[print-options-finishing]

BP-FD10 Folding Unit

200 sheets (based on 80 g/m2), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m2

BP-FN13 1k Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m2); Requires BP-RB10 Paper Pass Unit

BP-FN14 1k Saddle Stitch Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m2); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

BP-FN15 3k Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m2); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2); Requires BP-RB10 Paper Pass Unit

BP-FN16 3k Saddle Stitch Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m2); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

BP-FN18 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity*; Stapling capacity: max. 50-sheet multi-position staple*; Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max.10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2)

BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

BP-TR12 Exit Tray Unit

[empty]

MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

MX-PN14C Punch Module - 2/4 Hole

Punch module for BP-FN11/BP-FN12

MX-PN14D Punch Module - 4 Hole Wide

Punch module for BP-FN11/BP-FN12

MX-PN15C Punch Module - 2/4 Hole

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN15D Punch Module - 4 Hole Wide

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-TR20N Job Separator Tray

Requires BP-TU10 Exit Tray Cabinet

[print-options-security]

BP-FR12U Data Security Kit

Commercial version

BP-VD10 Virus Detection Kit

[empty]

[print-options-faxing]

BP-FX11 Fax Expansion Kit

[empty]

MX-FWX1 Internet Fax Expansion Kit

[empty]

[print-options-storage]

BP-SD10 High Capacity SSD

512GB SSD

[print-options-scharp-osa]

MX-AMX1 Application Integration Module

[empty]

[print-options-printing]

MX-PF10 Barcode Font Kit

Enables barcode printing

Dane techniczne

Ogólne

Prędkość: A4 kolor (str./min.)	45
Prędkość: A4 mono (str./min.)	45
Prędkość: SRA3 kolor (str./min.)	23
Prędkość: SRA3 mono (str./min.)	23
Format papieru: min.	A6R
Format papieru: maks.	SRA3
Gramatura papieru: min. (g/m ²)	52
Gramatura papieru: maks. (g/m ²)	300
Pojemność podajników na papier: std (ark.)	650
Pojemność podajników na papier: maks. (ark.)	6300
Czas nagrzewania (s)	14
Pamięć ogólna: maks. (GB)	5
Pamięć masowa: Standardowa	SSD
Pamięć masowa: Opcjonalna	SSD
Pojemność dysku SSD: Standardowa (GB)	256
Pojemność dysku SSD: Opcjonalna (GB)	512
Dupleks	Std.
Zasilanie: częstotliwość min. (Hz)	50
Zasilanie: częstotliwość maks. (Hz)	60
Zasilanie: napięcie min. (V)	200
Zasilanie: napięcie maks. (V)	240
Pobór energii (kW)	1,84
Wymiary: szerokość modułu głównego (mm)	609
Wymiary: głębokość modułu głównego (mm)	662
Wymiary: wysokość modułu głównego (mm)	860
Waga (kg)	85

Faks

Faks	Opt.
Metoda kompresji	MH, MR, MMR, JBIG
Protokół komunikacyjny	Super G3, G3
Czas przesyłania (s)	2
Prędkość modemu: min. (bps)	2400
Prędkość modemu: maks. (bps)	33600
Rozdzielczość wysyłania: std (dpi)	203.2 x 97.8 dpi
Rozdzielczość wysyłania: Ultra Fine (dpi)	406.4 x 391 dpi
Format dokumentów: min.	A5
Format dokumentów: maks.	A3
Pamięć: maks. (GB)	4
Skala szarości (poziomy)	256
Rejestracja wybierania: jednoprzyciskowe/szybkie wybieranie	2000
Rozsyłanie (maks. ilość miejsc)	500

Złącze bezprzewodowe

Złącze bezprzewodowe	Std.
Zgodność	IEEE802.11a/ac/b/g/n
Tryb dostępu	Tryb infrastruktury, Tryb Software AP
Bezpieczeństwo	WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, WPA3 EAP

Drukowanie

Drukarka sieciowa	Std.
Rozdzielczość (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Złącza: std	USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T
Obsługiwane systemy: std	Windows 10, Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows Server 2025, Mac OS X 10.15, Mac OS X 11, Mac OS X 12, Mac OS X 13, Mac OS X 14, Mac OS X 15
Protokoły sieciowe	TCP/IP (IPv4, IPv6)
Protokoły drukowania	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FTP for downloading print files, IPP, SMB, WSD
Dostępne czcionki	80 PCL, 139 PostScript 3

Kopiowanie

Format oryginałów: maks.	A3
Czas wykonania pierwszej kopii: kolor (s)	6,5
Czas wykonania pierwszej kopii: mono (s)	4,6
Sortowanie elektroniczne	Opt.
Kopiowanie seryjne (maks. kopii)	9999
Rozdzielczość skanowania: mono (dpi)	600 x 600, 600 x 400, 600 x 300
Rozdzielczość skanowania: kolor (dpi)	600 x 600
Rozdzielczość drukowania (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Gradacja: kolor (odpowiednio poziomów)	256
Zakres przeskalowania: min. (%)	25
Zakres przeskalowania: maks. (%)	400
Predefiniowane współczynniki kopiowania	10

Skanowanie

Skaner sieciowy	Std.
Skanowanie trybach	Push scan, Pull scan
Rozdzielczość skanowania "Push" (dpi)	100, 150, 200, 300, 400, 600
Rozdzielczość skanowania "Pull" (dpi)	75, 100, 150, 200, 300, 400, 600, 50-9600
Formaty plików: std	TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RTF)
Miejsca skanowania: pulpit	Pulpit, FTP, Email, Folderu sieciowego, Pamięci USB

Pliki

Funkcja archiwizacji dokumentów	Std.
Programowane zadania	Kopiowanie, Drukowanie, Skanowanie, Wysyłanie faksów
Foldery do przechowywania dokumentów	Folder tymczasowy, Folder główny, Foldery własne (maks. 1000)
Przechowywanie faksów poufnych	False

Wykańczanie

Pojemność wyjściowa: min. (ark.)	500
Pojemność wyjściowa: maks. (ark.)	3250
Pojemność zszywania: maks. (ark.)	65
Tworzenie broszur	Opt.
Sortowanie z przesunięciem	Std.
Dziurkowanie	Opt.

Wydajność tonerów

Czarny (stron przy 5% pokryciu)	40000
Cyan (stron przy 5% pokryciu)	24000
Magenta (stron przy 5% pokryciu)	24000
Yellow (stron przy 5% pokryciu)	24000



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logos are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: Sharp BP-71C45, 14/10/2025